




# RIC R

## RECEIVER-IN-CANAL RECHARGEABLE

Livio 1000 | Livio 1200

### Fitting Range

- RIC R 40
- RIC R 50
- RIC R 60



### Color Guide



### Accessory Compatibility




- TV
- Remote Microphone +
- Remote
- Mini Remote Microphone
- 2.4 GHz Programmer

### Patient Features

- Tinnitus Technology
- Wireless Connectivity
- Telecoil
- Rechargeable

Measurement	40 Gain Data		50 Gain Data		60 Gain Data	
	ANSI/IEC 2cc Coupler	IEC OES Coupler	ANSI/IEC 2cc Coupler	IEC OES Coupler	ANSI/IEC 2cc Coupler	IEC OES Coupler
Peak OSPL90 (dB SPL)	107	120	115	127	120	131
HFA OSPL90 (dB SPL)	102	N/A	109	N/A	117	N/A
RTF OSPL90 (dB SPL)	N/A	112	N/A	119	N/A	127
Peak Gain (dB)	40	52	50	63	60	71
HFA Full-On Gain (dB)	35	N/A	45	N/A	56	N/A
RTF Full-On Gain (dB)	N/A	43	N/A	55	N/A	65
<b>Frequency Range (Hz)</b>	<100-7700	<100-7700	<100-7700	<100-7800	<100-7700	<100-7800
Reference Test Freq. (kHz)	N/A	1.6	N/A	1.6	N/A	1.6
HFA Frequencies (kHz)	1.0, 1.6, 2.5	N/A	1.0, 1.6, 2.5	N/A	1.0, 1.6, 2.5	N/A
Reference Test Gain (dB)	25	36	32	44	40	52
Equivalent Input Noise (dB)	26	26	26	26	26	26
<b>Harmonic Distortion</b>						
500 Hz (%)	<3	<3	<3	<3	<3	<3
800 Hz (%)	<3	<3	<3	<3	<3	<3
1600 Hz (%)	<3	<3	<3	<3	<3	<3
<b>Induction Coil Sensitivity</b>						
HFA SPLITS (ANSI) (dB SPL)	77	N/A	84	N/A	92	N/A
MASL (IEC) (dB SPL)	70	N/A	77	N/A	84	N/A
<b>Estimated Lithium ION Battery Life</b>						
Li-Ion Rechargeable Battery (hrs)	24*	24*	24*	24*	24*	24*
<b>Tinnitus Therapy Stimulus</b>						
Max RMS Output (dB SPL)	87		87		87	
Weighted RMS Output Level (dB SPL)	87		87		87	
Max 1/3 Octave Output (dB SPL)	87		87		87	

▶ Matrices: 107/40, 115/50, 120/60

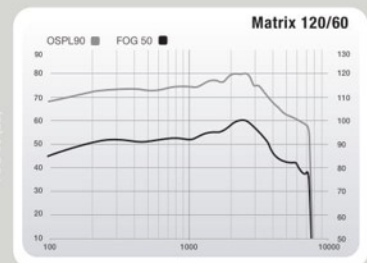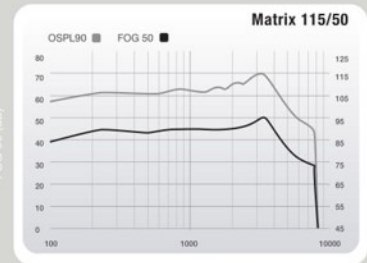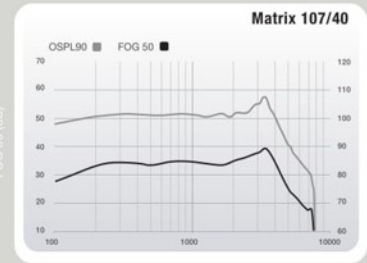

\*Results will vary based on wireless and feature usage.